



DuraSoak™ Series General Purpose Light-Duty Pads




What's Inside:

DuraSoak™ General Purpose Absorbents start with excess material from our popular shop towels



Absorbents

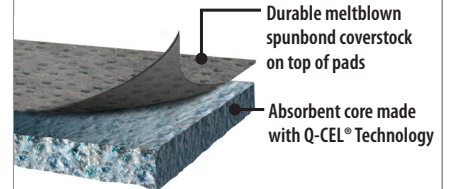

Made in the U.S.A.

Absorbs up to 20.1 gallons of oil per bale*

* per ASTM F726-06

- Made with 65% recycled shop towel fibers
- Meltblown-spunbond coverstock on top side of the absorbent core creates a durable sorbent pad
- Absorbs both oil and water as well as grease, transmission fluid, hydraulic fluid, diesel fuel, coolants and many other fluids
- More absorbent and a more cost effective alternative than the leading competitor's meltblown polypropylene sorbent pads
- Class A fire retardant when pad is dry (lab tested per ASTM E84)
- Ash content is 0.69% per ASTM D240
- 9,770 BTU/lb per ASTM D240
- U.S. Patent No. 8, 118, 117

Caution: Not intended for use with aggressive acids or caustics. Dispose of all sorbent materials in accordance with local, state and federal regulations.

Per Pad Comparison

**More absorbent than
New Pig** MAT412**



One pad of 23300 absorbs 0.201* gallons of SAE 30 motor oil vs. 1 pad of New Pig** MAT412 which adsorbs 0.1848* gallons of SAE 30 motor oil



DuraSoak™ Pads Outer Case

DuraSoak™ General Purpose Light-Duty Pads

Product Number:	23300
Pad Size:	15" x 19"
Quantity Per Case:	100/box
Color:	Gray
Cases Per Pallet:	30 cases/pallet
TI:	6 cases/layer
HI:	5 layers/pallet
Case Dimensions:	Length: 20"
	Width: 16"
	Height: 18.25"
Case Weight:	12 lbs
Pallets Per Truck:	30
UPC:	660708233003
ITF-14:	60660708233005

*absorbency results were independently tested by SF Analytical Laboratories using ASTM method F726-06 using SAE 30 motor oil

**New Pig is a registered trademark of New Pig Corporation.

To order, contact your **Authorized Sellers® Distributor**

©2012 Sellars Absorbent Materials, Inc. 10.12



General Purpose Absorbents


Sellers General Purpose ToolBox® DuraSoak™ pads not only provide more absorbency (see charts on individual product pages) than other popular competitive meltbown sorbents, they're made with recycled fibers (see chart) to create greater price stability. And with our recycled fibers being made from our internal excess wiper material, DuraSoak™ provides amazing product consistency.

4 Grades of Durasoak™



	AMOUNT OF RECYCLED FIBER	ABSORBENCY	DURABILITY
DuraSoak™ General Purpose Heavy-Duty	65%	■ ■ ■ ■ ■ ■ ■ ■	■ ■ ■ ■ ■ ■ ■ ■
DuraSoak™ General Purpose Medium-Duty	60%	■ ■ ■ ■ ■	■ ■ ■ ■ ■ ■ ■ ■
DuraSoak™ General Purpose Light-Duty	65%	■ ■ ■	■ ■ ■ ■
DuraSoak™ General Purpose Econo-Duty	75%	■ ■ ■ ■	■ ■

General Purpose Pads



DuraSoak™ Heavy-Duty Absorbent Pads

Product Number: 23100

Pad Size: 15" x 19"

Quantity Per Case: 50/box



DuraSoak™ Medium-Duty Absorbent Pads

Product Number: 23200

Pad Size: 15" x 19"

Quantity Per Case: 100/box



DuraSoak™ Light-Duty Absorbent Pads

Product Number: 23300

Pad Size: 15" x 19"

Quantity Per Case: 100/box



DuraSoak™ Econo-Duty Absorbent Pads

Product Number: 23400

Pad Size: 15" x 19"

Quantity Per Case: 100/box

General Purpose Rolls



DuraSoak™ Heavy-Duty Absorbent Rolls

Product Number: 23150

Roll Size: 28.5" X 75'

Quantity Per Case: 1/box



DuraSoak™ Medium-Duty Absorbent Rolls

Product Number: 23250

Roll Size: 28.5" X 125'

Quantity Per Case: 1/box



DuraSoak™ Light-Duty Absorbent Rolls

Product Number: 23350

Roll Size: 28.5" X 150'

Quantity Per Case: 1/box



DuraSoak™ Econo-Duty Absorbent Rolls

Product Number: 23450

Roll Size: 28.5" X 150'

Quantity Per Case: 1/box

General Purpose Split Rolls



DuraSoak™ Heavy-Duty Absorbent Split Rolls

Product Number: 23160

Roll Size: 14.25" x 75'

Quantity Per Case: 2/box



DuraSoak™ Medium-Duty Absorbent Split Rolls

Product Number: 23260

Roll Size: 14.25" x 125'

Quantity Per Case: 2/box




DuraSoak™ Light-Duty Absorbent Split Rolls

Product Number: 23360

Roll Size: 14.25" x 150'

Quantity Per Case: 2/box



DuraSoak™ Econo-Duty Absorbent Split Rolls

Product Number: 23460

Roll Size: 14.25" x 150'

Quantity Per Case: 2/box

CAUTION: Not intended for use with aggressive acids or caustics