




# ENDURO FLEX™

## THE ONE-STEP FINISHING SOLUTION

Over 20 years ago we introduced the first one-step finishing disc to the Canadian metal fabricating and finishing industry. Through continuous research and field tests, we have redesigned and reformulated the original disc several times. Today's Enduro-Flex one-step finishing discs are the result of this innovation. They are guaranteed to meet the challenges of today's metal fabricating and finishing industry.

### BETTER PRODUCTIVITY

New, ultra-sharp and refined zirconium grain stays sharper longer to remove more material faster – you get more work done in less time.

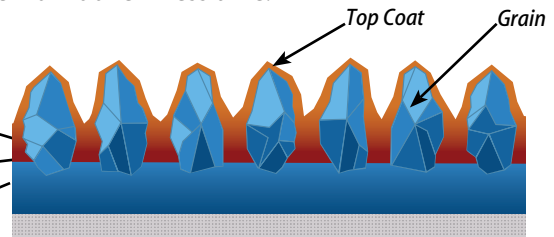


### HIGHER PERFORMANCE

Special top coat continuously cools and lubricates the disc for smooth, vibration-free grinding and sanding from start to finish.

Patented backing made from advanced polymer can be trimmed down easily for a customized feel.


### INCREASED SAVINGS

Now more than ever, the new ENDURO-FLEX flap discs will remove more welds and finish more surfaces in just one step – to substantially reduce your grinding and finishing costs.



Dia.	Arbor	Grit	Order No.	Max RPM	Std. Pkg.	Std. Ctn.	Lbs./Ctn.
4 1/2"	5/8"-11	40	06-B 454	13,300	10	40	9
4 1/2"	5/8"-11	60	06-B 456	13,300	10	40	7
4 1/2"	5/8"-11	80	06-B 458	13,300	10	40	7
4 1/2"	5/8"-11	120	06-B 462	13,300	10	40	6
4 1/2"	7/8"	40	15-R 454	13,300	10	40	9
4 1/2"	7/8"	60	15-R 456	13,300	10	40	7
4 1/2"	7/8"	80	15-R 458	13,300	10	40	7
4 1/2"	7/8"	120	15-R 462	13,300	10	40	6
5"	5/8"-11	40	06-B 504	12,200	10	40	12
5"	5/8"-11	60	06-B 506	12,200	10	40	10
5"	5/8"-11	80	06-B 508	12,200	10	40	9
5"	5/8"-11	120	06-B 512	12,200	10	40	8
6"	5/8"-11	40	06-B 604	10,200	10	40	16
6"	5/8"-11	60	06-B 606	10,200	10	40	15
6"	5/8"-11	80	06-B 608	10,200	10	40	14
6"	5/8"-11	120	06-B 612	10,200	10	40	13
7"	7/8"	40	15-R 704	8,600	10	40	25
7"	7/8"	60	15-R 706	8,600	10	40	21
7"	7/8"	80	15-R 708	8,600	10	40	19
7"	7/8"	120	15-R 712	8,600	10	40	18





## Long life

### USE ENDURO-FLEX ALL THE WAY DOWN!

No need to discard the disc when the flap overhang is worn down to the backing. The Enduro-Flex flap disc is equipped with a

- ✓ patented polymer backing for safe and easy trimming
- ✓ patented shape for faster trimming and vibration-free grinding all the way down to the stub



## Convenient and Safe

### SPIN-ON QUICK-CHANGE MOUNTING

Enduro-Flex flap discs feature a

- ✓ strong and safe built-in threaded arbor for quick and easy disc changes while ensuring total operator control
- ✓ new raised hub that fits all standard angle grinder back flanges



- ✓ Iron(Fe), Sulfur(S) and Chlorine(Cl) free
- ✓ Consistent finish without any discoloration
- ✓ Cool cutting will not load up or glaze
- ✓ Superior performance on all heat sensitive metals



Dia.	Arbor	Grit	Order No.	Max RPM	Std. Pkg.	Std. Ctn.	Lbs./ Ctn.
4 1/2"	5/8"-11	40	06-F 454	13,300	10	40	9
4 1/2"	5/8"-11	60	06-F 456	13,300	10	40	7
4 1/2"	5/8"-11	80	06-F 458	13,300	10	40	7
4 1/2"	5/8"-11	120	06-F 462	13,300	10	40	6
4 1/2"	7/8"	40	15-Q 454	13,300	10	40	9
4 1/2"	7/8"	60	15-Q 456	13,300	10	40	7
4 1/2"	7/8"	80	15-Q 458	13,300	10	40	7
4 1/2"	7/8"	120	15-Q 462	13,300	10	40	6
5"	5/8"-11	40	06-F 504	12,200	10	40	12
5"	5/8"-11	60	06-F 506	12,200	10	40	10
5"	5/8"-11	80	06-F 508	12,200	10	40	9
5"	5/8"-11	120	06-F 512	12,200	10	40	8
6"	5/8"-11	40	06-F 604	10,200	10	40	16
6"	5/8"-11	60	06-F 606	10,200	10	40	15
6"	5/8"-11	80	06-F 608	10,200	10	40	14
6"	5/8"-11	120	06-F 612	10,200	10	40	13
7"	7/8"	40	15-Q 704	8,600	10	40	25
7"	7/8"	60	15-Q 706	8,600	10	40	21
7"	7/8"	80	15-Q 708	8,600	10	40	19
7"	7/8"	120	15-Q 712	8,600	10	40	18