LEVITON®

decora plus™

Screwless Wallplates

For Decora Plus™ and Decora® Wiring Devices

80301, 80309, 80311

APPLICATION:

For use in all branch circuits in commercial, industrial and institutional installations to cover Decora Plus and Decora wiring devices in outlet and/or switch boxes in compliance with the NEC® and other regulatory codes.

FEATURES AND BENEFITS:

- Screwless, snap-on design for contemporary architectural styling
- Complete kit includes screwless snap-on wallplate and mounting bracket
- Constructed of durable polycarbonate to withstand abuse
- Subplate offers ease of installation – exclusive "Hook n' Snap" feature provides an easy, convenient wallplate installation
- Smooth face and rounded edges resist dust accumulation
- Accent any wall covering with wide selection of colors
- High dielectric strength and arc resistance, meeting or exceeding UL Standard 514
- Meets material test standards of NEMA WD-1, ANSI and Federal Specifications W-P-544. (Designer-configuration wallplates are not called for on Federal Specifications.)
- UL Listed, CSA Certified
- Backed by Leviton's Limited Ten-Year Warranty

TYPICAL SPECIFICATION:

Leviton Decora Plus Screwless Wallplates are designed to cover Decora Plus and Decora wiring devices in applications where a screwless, architectural appearance is desired. Commercial Specification Grade Decora Plus wallplates are UL Listed, CSA Certified and meet NEMA standards WD-1. Two piece Decora Plus wallplate and mounting assembly feature polycarbonate construction and is backed by Leviton's Limited Ten-Year Warranty.

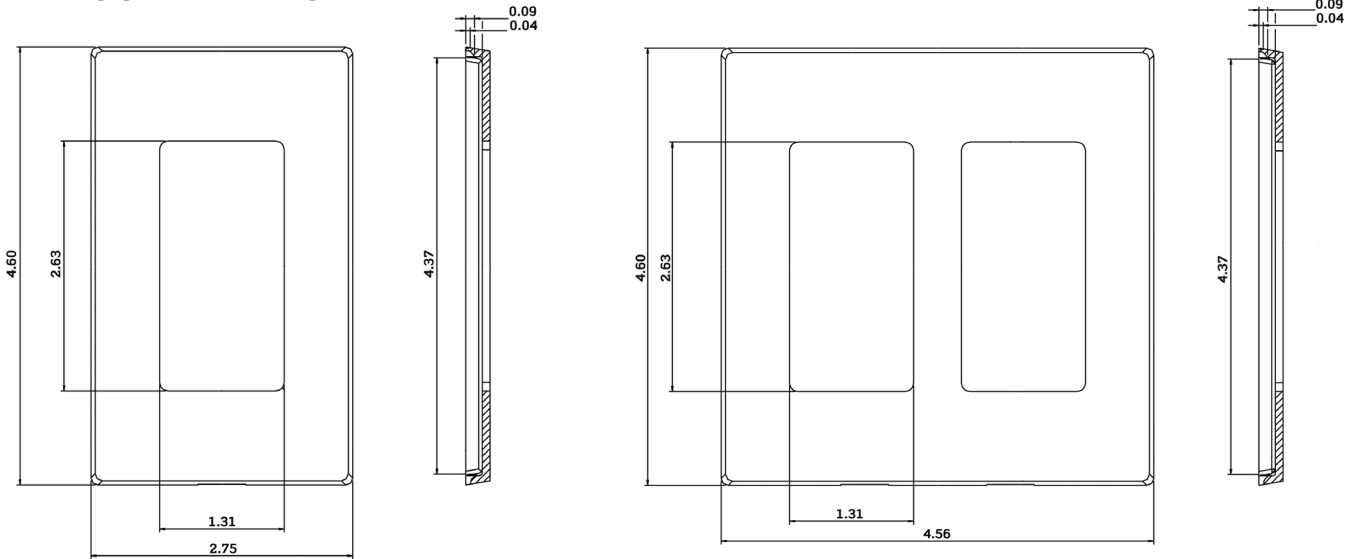**Decora Plus™ Screwless Wallplates**

TESTING AND CODE COMPLIANCE:

All wallplates are listed by Underwriters Laboratories, Inc. (UL), CSA Certified and meet test requirements of Federal Specification W-P-455a, with the exception of cutout configurations, since the latest Federal Specifications do not yet call for designer styling of wallplates.

Typical tests include (in part) selection of materials used (polycarbonate), mechanical strength and fire resistance (five 15 second applications of a gas flame to plastic materials).

These wallplates are suitable for use in accordance with state, country, municipal and local codes, including ANSI/NFPA 2011 National Electrical Code and the OSHA Code.

DIMENSIONAL DRAWING:

ORDERING INFORMATION:

Description		White	Ivory	Light Almond	Gray	Black	Brown
1-gang		80301-SW	80301-SI	80301-ST	80301-SGY	80301-SE	80301-S
2-gang		80309-SW	80309-SI	80309-ST	80309-SGY	80309-SE	80309-S
3-gang		80311-SW	80311-SI	80311-ST	____	80311-SE	80311-S
4-gang		80312-SW	80312-SI	80312-ST	____	80312-SE	80312-S
5-gang		80321-SW	80321-SI	80321-ST	____	____	____
6-gang		80326-SW	80326-SI	80326-ST	____	____	____

G-8876/H12-dp