

lev-lok® Modular Wiring Devices

15A & 20A, 125V Illuminated Receptacles
Extra Heavy Duty Hospital Grade

INDUSTRY
EXCLUSIVE!!!



The Lev-Lok line of hospital grade wiring devices has expanded with the introduction of our new Extra Heavy Duty Illuminated Receptacles. The illuminated face makes it easy to identify energized receptacles in both light and dark conditions, making them ideal for use on emergency circuits. They are available in both a traditional duplex configuration and an industry exclusive tamper-resistant version, satisfying National Electric Code (NEC) requirements for safety while at the same time confirming power to the receptacle.


Plus, the Lev-Lok Modular Wiring Device System speeds the installation, providing for faster, safer installation both during construction as well as at device change-out.

Features and Benefits:


- Industry exclusive Tamper-Resistant versions available
- Nickel-plated brass single-piece, wrap-around mounting strap with integral ground contacts, for conductivity and secure ground path
- Distinctive Green LED illuminated blade slots allows for easy power indication
- Constructed with impact-resistant thermoplastic nylon, assuring durability of the device
- Extra heavy duty triple wipe "T" contacts provide superior plug retention force to meet the rugged plug demands found in healthcare environments
- Grounding clip permanently secured to strap makes for most reliable ground connection
- Smooth face prevents dirt from collecting and makes cleaning faster and simpler



Features & Benefits

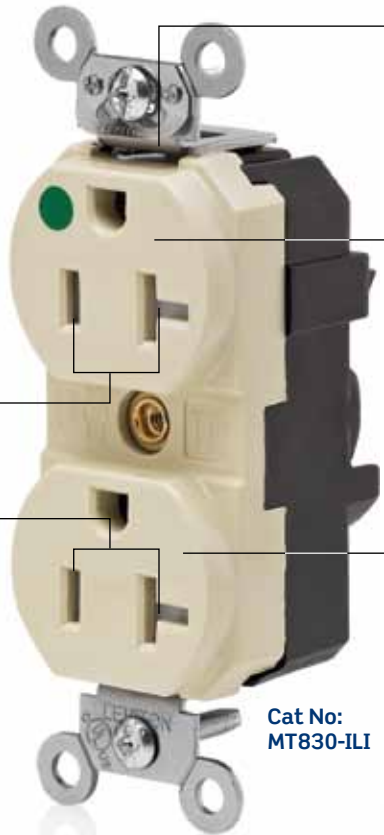


- Green LED Illuminated blade slots allow for easy power indication; LED rated for 100,000 hours
- Tamper resistant versions feature a shutter mechanism inside the receptacle to block access to the contacts unless a two-prong plug is inserted
- Smooth receptacle face makes cleaning faster and simpler




- Grounding clip permanently secured to strap makes for most reliable ground connection

Cat No:
MT830-ILI



- Two latches mate with wiring module for twice the security
- Solid brass locking pins for strong, secure connection between receptacle and wiring module



- Nickel-plated brass single-piece, wrap around mounting strap with integral ground contacts for continuous conductivity and secure ground path

Specifications

Electrical Specifications	
Amp or Amperage	15A or 20A
Voltage	125 Volt
NEMA	5-15R or 5-20R
Pole	2
Wire	3
Grounding	Self-Ground Clip
Dielectric Voltage	Withstands 2000V per UL 498
Current Limiting	Full Rated Current
Temperature Rise	Max 30°C after 250 cycles of overload at 200% of rated current
Illumination	100,000 HR Green LED's

Material Specifications	
Body Material	Nylon
Face Material	Nylon
Strap Material	Nickel Plated Brass
Line Contacts	0.040" Brass
Locking Pins	Solid Brass
Ground Clip	Brass
Shutter Mechanism (TR versions only)	Derlin® Acetal


Mechanical Specifications	
Lead Identification	Leads identified in accordance with UL498 (black, white, & green)
Product ID	Markings are permanently marked on device

Standards and Certifications	
NEMA	WD-6
ANSI	C-73
UL 498 & Fed Spec WD496	E13399
CSA	152105
NOM	057
Warranty	10-Year Limited
RoHS	Compliant

Environmental Specifications	
Flammability	Rated V2 Per UL 94
Operating Temperature	-40C To 60C

AC Horsepower Ratings	
Horsepower Rating	15A-1/2 HP; 20A-1 HP

Dimensional Drawings

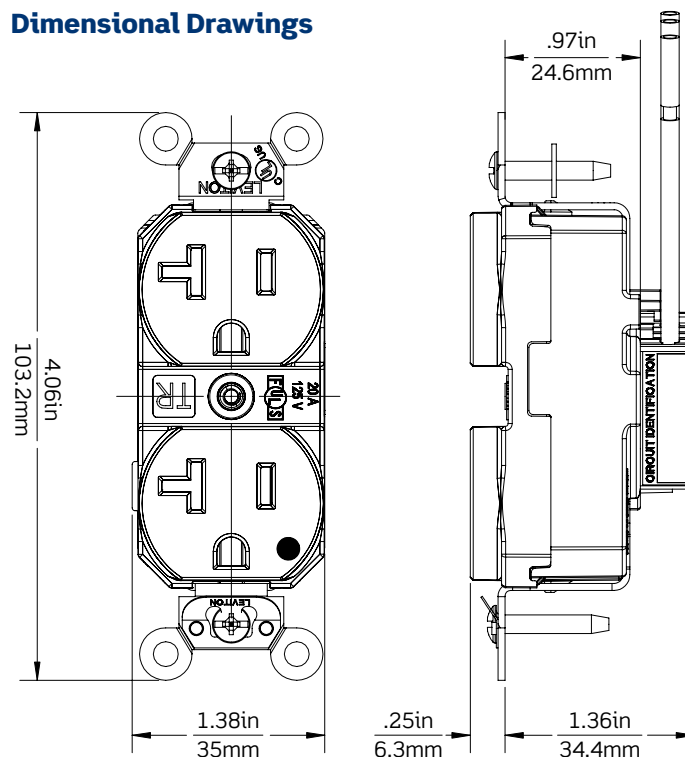

Ordering Information

Rating	Color	Extra Heavy Duty Hospital Grade, Traditional Duplex	
		Standard	Tamper-Resistant
15A/125V	Ivory	M8200-ILI	MT820-ILI
15A/125V	White	M8200-ILW	MT820-ILW
15A/125V	Gray	M8200-ILG	MT820-ILG
15A/125V	Red	M8200-ILR	MT820-ILR
15A/125V	Light Almond	M8200-ILT	MT820-ILT
20A/125V	Ivory	M8300-ILI	MT830-ILI
20A/125V	White	M8300-ILW	MT830-ILW
20A/125V	Gray	M8300-ILG	MT830-ILG
20A/125V	Red	M8300-ILR	MT830-ILR
20A/125V	Light Almond	M8300-ILT	MT830-ILT

Description	Module Color	Cat. No.
6-inch Long Stranded Wire Leads	White	MSTWL-A
6-inch Long Stranded Wire Leads with 4-port Push Wire Connectors	White	MSTWL-WST
6-inch Long Solid Wire Leads	White	MSTWL-SDA
6-inch Long Stranded Wire Leads with 4-port Push Wire Connectors	White	MSTWL-WSD

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747
 Telephone: 1-800-323-8920 • Fax: 1-800-832-9538
 Tech Line (8:30AM-7:00PM E.S.T. Monday-Friday): 1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Blvd, Pointe-Claire, QC H9R 1E9
 Telephone: 1-800-469-7890 • Fax: 1-800-563-1853

Leviton S. de R.L. de C.V.

Lago Tana 43, Col. Huichapan, Miguel Hidalgo, CP 11290 México DF
 Telephone: (+52) 55-5082-1040 • Fax: (+52) 55-5386-1797 • www.leviton.com.mx

Leviton Middle East

J/Alf Free Zone, View 19 7th Floor, Office 701 • PO Box 262742 Dubai, UAE
 Telephone: +971 4 886 4722 • Fax: +971 4 886 4723

Visit our Website at: www.leviton.com/industrial email: industrial@leviton.com

© 2011 Leviton Manufacturing Co., Inc. All rights reserved. Delrin is a registered trademark of E.I. du Pont de Nemours and Company.
 Note: Features and specifications subject to change.

