



The **NATURAL** choice for *all* your **wiping & spill control** needs.

EverSoak® Preferred Barrel Top Sorbent Pads




Absorbs up to 6.5 gallons of oil per bale *

* per ASTM F726-06

Sorbents

Preferred Barrel Top Sorbent Pads

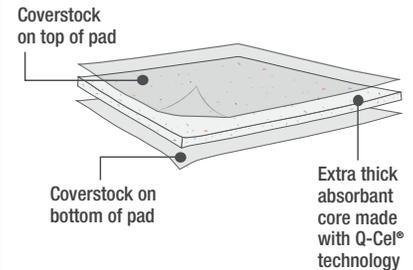

Made in the USA

- Made with 80% recycled cellulose fibers
- 22" in diameter so they will fit standard 55 gallon drums and help keep liquids from getting to floor
- Heavy-weight general purpose oil absorbent pads soak up both oil and water as well as grease, transmission fluid, hydraulic fluid, diesel fuel, coolants and many other fluids
- Absorbs as much as 2 of the leading competitors' heavy-weight meltblown pads (lab tested per EDANA 10.4-02)
- Due to the incredible absorbency of the EVERSOAK® PREFERRED Barrel Top Absorbent Pads, 10 PREFERRED barrel top absorbent pads will soak up as much as 20 of the leading competitor's meltblown barrel top absorbent pads allowing you to save valuable time and money
- Ash content is 1.8% per ASTM D482
- 9,611 BTU/lb ASTM D5468
- Made with minimal oil derivatives allowing for stable pricing
- Class A fire retardant when pad is dry (lab tested per ASTM E84)
- Helps you comply with 29 CFR 1910.22(a) (2)

Caution: Not intended for use with aggressive acids or caustics. Dispose of all sorbent materials in accordance with local, state and federal regulations.



Preferred Barrel Top Pads Outer Case



Preferred Barrel Top Pads Outer Case on a Pallet

PREFERRED Barrel Top Sorbent Pads

Product Number:	22866
Pad Size:	22" Diameter
Quantity Per Case:	10/box
Color:	Grey
Cases Per Pallet:	80 cases/pallet LTL
	80 cases per pallet TL
TI:	4 cases/layer
HI:	20 layers/pallet
Case Dimensions:	Length: 22.5"
	Width: 22.5"
	Height: 4"
Case Weight:	6 lbs
Pallets Per Truck:	26
UPC:	660708228665
GTIN:	NA

To order, contact your **Authorized Sellars® Distributor**

©2011 Sellars Absorbent Materials, Inc. 6.11

