

## SET-3G™ High-Strength Epoxy Adhesive

SET-3G is an epoxy-based anchoring adhesive with high design strength and proven performance. SET-3G is a 1:1 ratio, two-component, anchoring adhesive for concrete (cracked and uncracked). SET-3G installs and performs in a variety of environmental conditions and temperature extremes.

### Features

- Exceptional performance — superior bond strengths permit ductile solutions in high seismic areas
- Design flexibility — improved sustained load performance at elevated temperature
- Jobsite versatility — can be specified for all base material conditions when in-service temperatures range from -40°F (-40°C) to 176°F (80°C)
- Recognized per ICC ES AC308 for post-installed rebar development and splice length design provisions
- Approved for installation with multiple vacuum-drill bit systems without further hole cleaning. See Code Report (ESR-4057) and engineering letter at [strongtie.com](http://strongtie.com) for approved systems.

### Product Information

Mix Ratio/Type	1:1 epoxy
Mixed Color	Gray
Base Materials	Concrete and masonry — cracked and uncracked
Base Material Conditions	Dry, water-saturated, water-filled hole, submerged
Anchor Type	Threaded rod or rebar
Substrate Installation Temperature	40°F (4°C) to 100°F (38°C)
In-Service Temperature Range	-40°F (-40°C) to 176°F (80°C)
Storage Temperature	45°F (7°C) and 90°F (32°C)
Shelf Life	24 months
Volatile Organic Compound (VOC)	2 g/L
Chemical Resistance	See pp. 242–243
Manufactured in the US using global materials	

### Test Criteria

SET-3G has been tested in accordance with ICC-ES AC308, AC58, ACI 355.4 and applicable ASTM test methods.

### Code Reports, Standards and Compliance

Concrete — ICC-ES ESR-4057 (including post-installed rebar connections, City of LA and Florida Building Code), Florida FL15730.

Masonry — ICC-ES ESR pending.

ASTM C881 and AASHTO M235 — Types I/IV and II/IV, Grade 3, Class B & C.

UL Certification — CDPH Standard Method v1.2.

NSF/ANSI/CAN 61 (216 in.<sup>2</sup> / 1,000 gal.).

### SET-3G Adhesive Cartridge System

Model No.	Capacity (ounces)	Cartridge Type	Carton Quantity	Dispensing Tool(s)	Mixing Nozzle <sup>3</sup>
SET3G10 <sup>4</sup>	8.5	Coaxial	12	CDT10S	EMN22I
SET3G22-N <sup>4</sup>	22	Side-by-side	10	EDT22S, EDTA22P, EDTA22CKT	
SET3G56	56	Side-by-side	6	EDTA56P	

1. Cartridge estimation guidelines are available at [strongtie.com/softwareandwebapplications/category](http://strongtie.com/softwareandwebapplications/category).
2. Detailed information on dispensing tools, mixing nozzles and other adhesive accessories is available at [strongtie.com](http://strongtie.com).
3. Use only Simpson Strong-Tie mixing nozzles in accordance with Simpson Strong-Tie instructions. Modification or improper use of mixing nozzle may impair SET-3G adhesive performance.
4. One EMN22I mixing nozzle and one extension are supplied with each cartridge.
5. Use of rodless pneumatic tools to dispense single-tube, coaxial adhesive cartridges is prohibited.



SET-3G Adhesive

### Installation Instructions

Installation instructions are located at the following locations: pp. 48–51; product packaging; or [strongtie.com/set3g](http://strongtie.com/set3g).

- Hole cleaning brushes are located on p. 52.

# SET-3G™ High-Strength Epoxy Adhesive

## SET-3G Cure Schedule<sup>1,2</sup>

Concrete Temperature		Gel Time (minutes)	Cure Time (hr.)
(°F)	(°C)		
40	4	120	192
50	10	75	72
60	16	50	48
70	21	35	24
90	32	25	24
100	38	15	24

For SI: 1°F = (°C x 9/5) + 32.

- For water-saturated concrete, submerged concrete and water-filled holes, the cure times shall be doubled.
- For installation of anchors in concrete where the temperature is below 70°F (21°C), the adhesive must be conditioned to a minimum temperature of 70°F (21°C).

## SET-3G Typical Properties

Property		Class B	Class C	Test Method
		(40°–60°F)	(>60°F)	
Consistency		Non-sag	Non-sag	ASTM C881
Bond Strength, Slant Shear	Hardened to Hardened Concrete, 2-Day Cure <sup>1</sup>	3,700 psi	3,300 psi	ASTM C882
	Hardened to Hardened Concrete, 14-Day Cure <sup>1</sup>	3,850 psi	3,350 psi	
	Fresh to Hardened Concrete, 14-Day Cure <sup>2</sup>	2,750 psi	2,750 psi	
Compressive Yield Strength, 7-Day Cure <sup>2</sup>		13,000 psi	15,350 psi	ASTM D695
Compressive Modulus, 7-Day Cure <sup>2</sup>		650,000 psi	992,000 psi	ASTM D695
Heat Deflection Temperature, 7-Day Cure <sup>2</sup>		147°F (64°C)		ASTM D648
Glass Transition Temperature, 7-Day Cure <sup>2</sup>		149°F (65°C)		ASTM E1356
Decomposition Temperature, 24-Hour Cure <sup>2</sup>		500°F (260°C)		ASTM E2550
Water Absorption, 24-Hours, 7-Day Cure <sup>2</sup>		0.13%		ASTM D570
Shore D Hardness, 24-Hour Cure <sup>2</sup>		84		ASTM D2240
Linear Coefficient of Shrinkage, 7-Day Cure <sup>2</sup>		0.002 in./in.		ASTM D2566
Coefficient of Thermal Expansion <sup>2</sup>		2.3 x 10 <sup>-5</sup> in./in.°F		ASTM C531

- Material and curing conditions: Class B at 40° ± 2°F, Class C at 60° ± 2°F.
- Material and curing conditions: 73° ± 2°F.

## SET-3G Installation Information and Additional Data for Threaded Rod and Rebar<sup>1</sup>



Characteristic	Symbol	Units	Nominal Anchor Diameter d <sub>a</sub> (in.) / Rebar Size						
			3/8 / #3	1/2 / #4	5/8 / #5	3/4 / #6	7/8 / #7	1 / #8	1 1/4 / #10
<b>Installation Information</b>									
Drill Bit Diameter for Threaded Rod	d <sub>hole</sub>	in.	7/16	9/16	1 1/16	7/8	1	1 1/8	1 3/8
Drill Bit Diameter for Rebar	d <sub>hole</sub>	in.	1/2	5/8	3/4	7/8	1	1 1/8	1 3/8
Maximum Tightening Torque	T <sub>inst</sub>	ft.-lb.	15	30	60	100	125	150	200
Minimum Embedment Depth	h <sub>ef, min</sub>	in.	2 3/8	2 3/4	3 1/8	3 1/2	3 3/4	4	5
Maximum Embedment Depth	h <sub>ef, max</sub>	in.	7 1/2	10	12 1/2	15	17 1/2	20	25
Minimum Concrete Thickness	h <sub>min</sub>	in.	h <sub>ef</sub> + 1 1/4			h <sub>ef</sub> + 2d <sub>hole</sub>			
Critical Edge Distance	c <sub>ac</sub>	in.	See footnote 2						
Minimum Edge Distance	c <sub>min</sub>	in.	1 3/4						2 3/4
Minimum Anchor Spacing	s <sub>min</sub>	in.	1	2 1/2	3			6	

1. The information presented in this table is to be used in conjunction with the design criteria of ACI 318-19, ACI 318-14 and ACI 318-11.

2. c<sub>ac</sub> = h<sub>ef</sub> (τ<sub>k, uncr</sub> / 1,160)<sup>0.4</sup> × [3.1 - 0.7(h/h<sub>ef</sub>)], where:

$$[h/h_{ef}] \leq 2.4$$

τ<sub>k, uncr</sub> = the characteristic bond strength in uncracked concrete, given in the tables that follow ≤ k<sub>uncr</sub> ((h<sub>ef</sub> × f'<sub>c</sub>)<sup>0.5</sup> / (π × d<sub>a</sub>))

h = the member thickness (inches)

h<sub>ef</sub> = the embedment depth (inches)

\*See p. 14 for an explanation of the load table icons.

# SET-3G™ Design Information — Concrete

SET-3G Tension Strength Design Data for Threaded Rod<sup>1,7</sup>



Characteristic	Symbol	Units	Nominal Rod Diameter (in.)									
			3/8	1/2	5/8	3/4	7/8	1	1 1/4			
<b>Steel Strength in Tension</b>												
Minimum Tensile Stress Area	$A_{se}$	in. <sup>2</sup>	0.078	0.142	0.226	0.334	0.462	0.606	0.969			
Tension Resistance of Steel — ASTM F1554, Grade 36	$N_{sa}$	lb.	4,525	8,235	13,110	19,370	26,795	35,150	56,200			
Tension Resistance of Steel — ASTM F1554, Grade 55			5,850	10,650	16,950	25,050	34,650	45,450	72,675			
Tension Resistance of Steel — ASTM A193, Grade B7			9,750	17,750	28,250	41,750	57,750	75,750	121,125			
Tension Resistance of Steel — Stainless Steel ASTM A193, Grade B8 and B8M (Types 304 and 316)			4,445	8,095	12,880	19,040	26,335	34,540	55,235			
Tension Resistance of Steel — Stainless Steel ASTM F593 CW (Types 304 and 316)			7,800	14,200	22,600	28,390	39,270	51,510	82,365			
Tension Resistance of Steel — Stainless Steel ASTM A193, Grade B6 (Type 410)			8,580	15,620	24,860	36,740	50,820	66,660	106,590			
Strength Reduction Factor for Tension — Steel Failure	$\phi$	—	0.75 <sup>5</sup>									
<b>Concrete Breakout Strength in Tension (2,500 psi ≤ f'<sub>c</sub> ≤ 8,000 psi)</b>												
Effectiveness Factor for Cracked Concrete	$k_{c,cr}$	—	17									
Effectiveness Factor for Uncracked Concrete	$k_{c,uncr}$	—	24									
Strength Reduction Factor — Concrete Breakout Failure in Tension	$\phi$	—	0.65 <sup>5</sup>									
<b>Bond Strength in Tension (2,500 psi ≤ f'<sub>c</sub> ≤ 8,000 psi)<sup>6</sup></b>												
Minimum Embedment	$h_{ef,min}$	in.	2 3/8	2 3/4	3 1/8	3 1/2	3 3/4	4	5			
Maximum Embedment	$h_{ef,max}$	in.	7 1/2	10	12 1/2	15	17 1/2	20	25			
Continuous Inspection	Temperature Range A <sup>2,4</sup>	Characteristic Bond Strength in Cracked Concrete <sup>8</sup>	$\tau_{k,cr}$	psi	1,448	1,402	1,356	1,310	1,265	1,219	1,128	
		Characteristic Bond Strength in Uncracked Concrete <sup>8</sup>	$\tau_{k,uncr}$	psi	2,357	2,260	2,162	2,064	1,967	1,868	1,672	
	Temperature Range B <sup>3,4</sup>	Characteristic Bond Strength in Cracked Concrete <sup>8</sup>	$\tau_{k,cr}$	psi	1,201	1,163	1,125	1,087	1,050	1,012	936	
		Characteristic Bond Strength in Uncracked Concrete <sup>8</sup>	$\tau_{k,uncr}$	psi	1,957	1,876	1,795	1,713	1,632	1,551	1,388	
	Anchor Category	Dry Concrete	—	1								
	Strength Reduction Factor	Dry Concrete	$\phi_{dry,ci}$	0.65 <sup>5</sup>								
	Anchor Category	Water-Saturated Concrete, Water-Filled Hole or Submerged Concrete	—	3			2					
	Strength Reduction Factor	Water-Saturated Concrete, Water-Filled Hole or Submerged Concrete	$\phi_{wet,ci}$	0.45 <sup>5</sup>			0.55 <sup>5</sup>					
	Periodic Inspection	Temperature Range A <sup>2,4</sup>	Characteristic Bond Strength in Cracked Concrete <sup>8</sup>	$\tau_{k,cr}$	psi	1,346	1,304	1,356	1,310	1,265	1,219	1,128
			Characteristic Bond Strength in Uncracked Concrete <sup>8</sup>	$\tau_{k,uncr}$	psi	2,192	2,102	2,162	2,064	1,967	1,868	1,672
Temperature Range B <sup>3,4</sup>		Characteristic Bond Strength in Cracked Concrete <sup>8</sup>	$\tau_{k,cr}$	psi	1,117	1,082	1,125	1,087	1,050	1,012	936	
		Characteristic Bond Strength in Uncracked Concrete <sup>8</sup>	$\tau_{k,uncr}$	psi	1,820	1,744	1,795	1,713	1,632	1,551	1,388	
Anchor Category		Dry Concrete	—	2			1					
Strength Reduction Factor		Dry Concrete	$\phi_{dry,pi}$	0.55 <sup>5</sup>			0.65 <sup>5</sup>					
Anchor Category		Water-Saturated Concrete, Water-Filled Hole or Submerged Concrete	—	3								
Strength Reduction Factor		Water-Saturated Concrete, Water-Filled Hole or Submerged Concrete	$\phi_{wet,pi}$	0.45 <sup>5</sup>								
Reduction Factor for Seismic Tension	$\alpha_{N,seis}$ <sup>9</sup>	—	1.0	0.9	1.0	1.0	1.0	1.0	1.0			

- The information presented in this table is to be used in conjunction with the design criteria of ACI 318-19, ACI 318-14 and ACI 318-11.
- Temperature Range A: Maximum short-term temperature = 160°F, Maximum long-term temperature = 110°F.
- Temperature Range B: Maximum short-term temperature = 176°F, Maximum long-term temperature = 110°F.
- Short-term concrete temperatures are those that occur over short intervals (diurnal cycling). Long-term temperatures are roughly constant over significant periods of time.
- The tabulated value of  $\phi$  applies when the load combinations from the IBC or ACI 318 are used and the requirements of ACI 318-19 17.5.3, ACI 318-14 17.3.3 or ACI 318-11 D.4.3, as applicable, are met. If the load combinations of ACI 318-11 Appendix C are used, refer to ACI 318-11 D.4.4 to determine the appropriate value of  $\phi$ .
- Bond strength values shown are for normal-weight concrete having a compressive strength of  $f'_c = 2,500$  psi. For higher compressive strengths up to 8,000 psi, the tabulated characteristic bond strength may be increased by a factor of  $(f'_c/2,500)^{0.35}$  for uncracked concrete and a factor of  $(f'_c/2,500)^{0.24}$  for cracked concrete.
- For lightweight concrete, the modification factor for bond strength shall be as given in ACI 318-19 17.2.4, ACI 318-14 17.2.6 or ACI 318-11 D.3.6, as applicable, where applicable.
- Characteristic bond strength values are for sustained loads, including dead and live loads.
- For anchors installed in regions assigned to Seismic Design Category C, D, E or F, the bond strength values must be multiplied by  $\alpha_{N,seis}$ .

\*See p. 14 for an explanation of the load table icons.

# SET-3G™ Design Information — Concrete



## SET-3G Tension Strength Design Data for Rebar<sup>1,7</sup>

Characteristic		Symbol	Units	Rebar Size							
				#3	#4	#5	#6	#7	#8	#10	
<b>Steel Strength in Tension</b>											
Minimum Tensile Stress Area		$A_{se}$	in. <sup>2</sup>	0.11	0.20	0.31	0.44	0.60	0.79	1.27	
Tension Resistance of Steel — Rebar (ASTM A615 Grade 60)		$N_{sa}$	lb.	9,900	18,000	27,900	39,600	54,000	71,100	114,300	
Tension Resistance of Steel — Rebar (ASTM A706 Grade 60)				8,800	16,000	24,800	35,200	48,000	63,200	101,600	
Strength Reduction Factor for Tension — Steel Failure		$\phi$	—	0.75 <sup>5</sup>							
<b>Concrete Breakout Strength in Tension (2,500 psi ≤ f'<sub>c</sub> ≤ 8,000 psi)</b>											
Effectiveness Factor for Cracked Concrete		$k_{c,cr}$	—	17							
Effectiveness Factor for Uncracked Concrete		$k_{c,uncr}$	—	24							
Strength Reduction Factor — Concrete Breakout Failure in Tension		$\phi$	—	0.65 <sup>5</sup>							
<b>Bond Strength in Tension (2,500 psi ≤ f'<sub>c</sub> ≤ 8,000 psi)<sup>6</sup></b>											
Minimum Embedment		$h_{ef,min}$	in.	2¾	2¾	3⅞	3½	3¾	4	5	
Maximum Embedment		$h_{ef,max}$	in.	7½	10	12½	15	17½	20	25	
Continuous Inspection	Temperature Range A <sup>2,4</sup>	Characteristic Bond Strength in Cracked Concrete <sup>8</sup>	$\tau_{k,cr}$	psi	1,448	1,402	1,356	1,310	1,265	1,219	1,128
		Characteristic Bond Strength in Uncracked Concrete <sup>8</sup>	$\tau_{k,uncr}$	psi	2,269	2,145	2,022	1,898	1,774	1,651	1,403
	Temperature Range B <sup>3,4</sup>	Characteristic Bond Strength in Cracked Concrete <sup>8</sup>	$\tau_{k,cr}$	psi	1,201	1,163	1,125	1,087	1,050	1,012	936
		Characteristic Bond Strength in Uncracked Concrete <sup>8</sup>	$\tau_{k,uncr}$	psi	1,883	1,781	1,678	1,575	1,473	1,370	1,165
	Anchor Category		Dry Concrete	—	1						
	Strength Reduction Factor		Dry Concrete	$\phi_{dry,ci}$	0.65 <sup>5</sup>						
	Anchor Category		Water-Saturated Concrete, Water-Filled Hole or Submerged Concrete	—	3			2			
	Strength Reduction Factor		Water-Saturated Concrete, Water-Filled Hole or Submerged Concrete	$\phi_{wet,ci}$	0.45 <sup>5</sup>			0.55 <sup>5</sup>			
Periodic Inspection	Temperature Range A <sup>2,4</sup>	Characteristic Bond Strength in Cracked Concrete <sup>8</sup>	$\tau_{k,cr}$	psi	1,346	1,304	1,356	1,310	1,265	1,219	1,128
		Characteristic Bond Strength in Uncracked Concrete <sup>8</sup>	$\tau_{k,uncr}$	psi	2,110	1,995	2,022	1,898	1,774	1,651	1,403
	Temperature Range B <sup>3,4</sup>	Characteristic Bond Strength in Cracked Concrete <sup>8</sup>	$\tau_{k,cr}$	psi	1,117	1,082	1,125	1,087	1,050	1,012	936
		Characteristic Bond Strength in Uncracked Concrete <sup>8</sup>	$\tau_{k,uncr}$	psi	1,751	1,656	1,678	1,575	1,473	1,370	1,165
	Anchor Category		Dry Concrete	—	2			1			
	Strength Reduction Factor		Dry Concrete	$\phi_{dry,pi}$	0.55 <sup>5</sup>			0.65 <sup>5</sup>			
	Anchor Category		Water-Saturated Concrete, Water-Filled Hole or Submerged Concrete	—	3						
	Strength Reduction Factor		Water-Saturated Concrete, Water-Filled Hole or Submerged Concrete	$\phi_{wet,pi}$	0.45 <sup>5</sup>						
Reduction Factor for Seismic Tension		$\alpha_{N,seis}$ <sup>9</sup>	—	1.0	1.0	1.0	1.0	1.0	1.0	1.0	

- The information presented in this table is to be used in conjunction with the design criteria of ACI 318-19, ACI 318-14 and ACI 318-11.
- Temperature Range A: Maximum short-term temperature = 160°F, Maximum long-term temperature = 110°F.
- Temperature Range B: Maximum short-term temperature = 176°F, Maximum long-term temperature = 110°F.
- Short-term concrete temperatures are those that occur over short intervals (diurnal cycling). Long-term temperatures are roughly constant over significant periods of time.
- The tabulated value of  $\phi$  applies when the load combinations from the IBC or ACI 318 are used and the requirements of ACI 318-19 17.5.3, ACI 318-14 17.3.3 or ACI 318-11 D.4.3, as applicable, are met. If the load combinations of ACI 318-11 Appendix C are used, refer to ACI 318-11 D.4.4 to determine the appropriate value of  $\phi$ .
- Bond strength values shown are for normal-weight concrete having a compressive strength of f'<sub>c</sub> = 2,500 psi. For higher compressive strengths up to 8,000 psi, the tabulated characteristic bond strength may be increased by a factor of (f'<sub>c</sub>/2,500)<sup>0.35</sup> for uncracked concrete and a factor of (f'<sub>c</sub>/2,500)<sup>0.24</sup> for cracked concrete.
- For lightweight concrete, the modification factor for bond strength shall be as given in ACI 318-19 17.2.4, ACI 318-14 17.2.6 or ACI 318-11 D.3.6, as applicable, where applicable.
- Characteristic bond strength values are for sustained loads, including dead and live loads.
- For anchors installed in regions assigned to Seismic Design Category C, D, E or F, the bond strength values must be multiplied by  $\alpha_{N,seis}$ .

\*See p. 14 for an explanation of the load table icons.

# SET-3G™ Design Information — Concrete

## SET-3G Shear Strength Design Data for Threaded Rod<sup>1</sup>



Characteristic	Symbol	Units	Nominal Rod Diameter (in.)						
			3/8	1/2	5/8	3/4	7/8	1	1 1/4
<b>Steel Strength in Shear</b>									
Minimum Shear Stress Area	$A_{se}$	in. <sup>2</sup>	0.078	0.142	0.226	0.334	0.462	0.606	0.969
Shear Resistance of Steel — ASTM F1554, Grade 36	$V_{sa}$	lb.	2,715	4,940	7,865	11,625	16,080	21,090	33,720
Shear Resistance of Steel — ASTM F1554, Grade 55			3,510	6,390	10,170	15,030	20,790	27,270	43,605
Shear Resistance of Steel — ASTM A193, Grade B7			5,850	10,650	16,950	25,050	34,650	45,450	72,675
Reduction factor for Seismic Shear — Carbon Steel	$\alpha_{V,seis}^3$	—	0.75					1.0	
Shear Resistance of Steel — Stainless Steel ASTM A193, Grade B8 and B8M (Types 304 and 316)	$V_{sa}$	lb.	2,665	4,855	7,730	11,425	15,800	20,725	33,140
Shear Resistance of Steel — Stainless Steel ASTM F593 CW (Types 304 and 316)			4,680	8,520	13,560	17,035	23,560	30,905	49,420
Shear Resistance of Steel — Stainless Steel ASTM A193, Grade B6 (Type 410)			5,150	9,370	14,915	22,040	30,490	40,000	63,955
Reduction factor for Seismic Shear — Stainless Steel	$\alpha_{V,seis}^3$	—	0.80		0.75			1.0	
Strength Reduction Factor for Shear — Steel Failure	$\phi$	—	0.65 <sup>2</sup>						
<b>Concrete Breakout Strength in Shear</b>									
Outside Diameter of Anchor	$d_a$	in.	0.375	0.5	0.625	0.75	0.875	1	1.25
Load-Bearing Length of Anchor in Shear	$l_e$	in.	Min. of $h_{ef}$ and 8 times anchor diameter						
Strength Reduction Factor for Shear — Breakout Failure	$\phi$	—	0.70 <sup>2</sup>						
<b>Concrete Pryout Strength in Shear</b>									
Coefficient for Pryout Strength	$k_{cp}$	in.	1.0 for $h_{ef} < 2.50"$ ; 2.0 for $h_{ef} \geq 2.50"$						
Strength Reduction Factor for Shear — Breakout Failure	$\phi$	—	0.70 <sup>2</sup>						

- The information presented in this table is to be used in conjunction with the design criteria of ACI 318-19, ACI 318-14 and ACI 318-11.
- The tabulated value of  $\phi$  applies when the load combinations from the IBC or ACI 318 are used and the requirements of ACI 318-19 17.5.3, ACI 318-14 17.3.3 or ACI 318-11 D.4.3, as applicable, are met. If the load combinations of ACI 318-11 Appendix C are used, refer to ACI 318-11 D.4.4 to determine the appropriate value of  $\phi$ .
- The values of  $V_{sa}$  are applicable for both cracked concrete and uncracked concrete. For anchors installed in regions assigned to Seismic Design Category C, D, E or F,  $V_{sa}$  must be multiplied by  $\alpha_{V,seis}$  for the corresponding anchor steel type.

<sup>1</sup>See p. 14 for an explanation of the load table icons.

# SET-3G™ Design Information — Concrete



## SET-3G Shear Strength Design Data for Rebar<sup>1</sup>

Characteristic	Symbol	Units	Rebar Size						
			#3	#4	#5	#6	#7	#8	#10
<b>Steel Strength in Shear</b>									
Minimum Shear Stress Area	$A_{se}$	in. <sup>2</sup>	0.110	0.200	0.310	0.440	0.600	0.790	1.270
Shear Resistance of Steel — Rebar (ASTM A615 Grade 60)	$V_{sa}$	lb.	5,940	10,800	16,740	23,760	32,400	42,660	68,580
Shear Resistance of Steel — Rebar (ASTM A706 Grade 60)			5,280	9,600	14,880	21,120	28,800	37,920	60,960
Reduction Factor for Seismic Shear — Rebar (ASTM A615 Grade 60)	$\alpha_{V_{seis}}$ <sup>3</sup>	—	0.60						0.8
Reduction Factor for Seismic Shear — Rebar (ASTM A706 Grade 60)			0.60						0.8
Strength Reduction Factor for Shear — Steel Failure	$\phi$	—	0.65 <sup>2</sup>						
<b>Concrete Breakout Strength in Shear</b>									
Outside Diameter of Anchor	$d_a$	in.	0.375	0.5	0.625	0.75	0.875	1	1.25
Load-Bearing Length of Anchor in Shear	$l_e$	in.	Min. of $h_{ef}$ and 8 times anchor diameter						
Strength Reduction Factor for Shear — Breakout Failure	$\phi$	—	0.70 <sup>2</sup>						
<b>Concrete Pryout Strength in Shear</b>									
Coefficient for Pryout Strength	$k_{cp}$	in.	1.0 for $h_{ef} < 2.50"$ ; 2.0 for $h_{ef} \geq 2.50"$						
Strength Reduction Factor for Shear — Breakout Failure	$\phi$	—	0.70 <sup>2</sup>						

- The information presented in this table is to be used in conjunction with the design criteria of ACI 318-19, ACI 318-14 and ACI 318-11.
- The tabulated value of  $\phi$  applies when the load combinations from the IBC or ACI 318 are used and the requirements of ACI 318-19 17.5.3, ACI 318-14 17.3.3 or ACI 318-11 D.4.3, as applicable, are met. If the load combinations of ACI 318-11 Appendix C are used, refer to ACI 318-11 D.4.4 to determine the appropriate value of  $\phi$ .
- The values of  $V_{sa}$  are applicable for both cracked concrete and uncracked concrete. For anchors installed in regions assigned to Seismic Design Category C, D, E or F,  $V_{sa}$  must be multiplied by  $\alpha_{V_{seis}}$  for the corresponding anchor steel type.

For additional load tables, visit [strongtie.com/set3g](http://strongtie.com/set3g).




## Anchor Designer™ Software for ACI 318, ETAG and CSA

Simpson Strong-Tie® Anchor Designer software accurately analyzes existing design or suggests anchor solutions based on user-defined design elements in cracked and uncracked concrete conditions.

<sup>\*</sup>See p. 14 for an explanation of the load table icons.

# SET-3G™ Design Information — Concrete

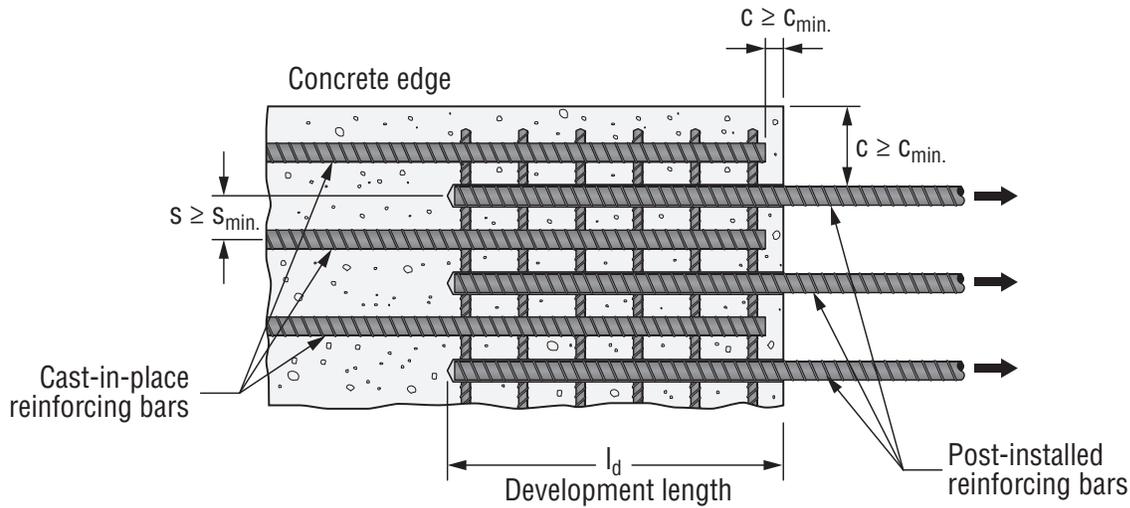

SET-3G Development Length for Rebar Dowel




Rebar Size	Drill Bit Diameter (in.)	Clear Cover, in. (mm)	Development Length, in. (mm)				
			$f'_c = 2,500$ psi (17.2 MPa) Concrete	$f'_c = 3,000$ psi (20.7 MPa) Concrete	$f'_c = 4,000$ psi (27.6 MPa) Concrete	$f'_c = 6,000$ psi (41.4 MPa) Concrete	$f'_c = 8,000$ psi (55.2 MPa) Concrete
#3	1/2	1.125 (29)	12 (305)	12 (305)	12 (305)	12 (305)	12 (305)
#4	5/8	1.125 (29)	14.4 (366)	14 (356)	12 (305)	12 (305)	12 (305)
#5	3/4	1.125 (29)	18 (457)	17 (432)	14.2 (361)	12 (305)	12 (305)
#6	7/8	1.125 (29)	21.6 (549)	20 (508)	17.1 (434)	14 (356)	13 (330)
#7	1	2.30 (58)	31.5 (800)	29 (737)	25 (635)	21 (533)	18 (457)
#8	1 1/8	2.30 (58)	36 (914)	33 (838)	28.5 (724)	24 (610)	21 (533)
#9	1 3/8	2.30 (58)	40.5 (1,029)	38 (965)	32 (813)	27 (686)	23 (584)
#10	1 3/8	2.30 (58)	45 (1,143)	42 (1,067)	35.6 (904)	30 (762)	26 (660)
#11	1 3/4	2.30 (58)	51 (1,295)	47 (1,194)	41 (1,041)	33 (838)	29 (737)

1. Tabulated development lengths are for static, wind and seismic load cases in Seismic Design Category A and B. Development lengths in Seismic Design Category C through F must comply with ACI 318-19 and ACI 318-14 Chapter 18 or ACI 318-11 Chapter 21, as applicable.
2. Rebar is assumed to be ASTM A615 Grade 60 or A706 ( $f_y = 60,000$  psi). For rebar with a higher yield strength, multiply tabulated values by  $f_y/60,000$  psi.
3. Concrete is assumed to be normal-weight concrete. For lightweight concrete, multiply tabulated values by 1.33.
4. Tabulated values assume bottom cover less than 12" cast below rebars ( $\Psi_1 = 1.0$ ).
5. Uncoated rebar must be used.
6. The value of  $K_{tr}$  is assumed to be 0. Refer to ACI 318-19 Section 25.4.2.4, ACI 318-14 Section 25.4.2.3 or ACI 318-11 Section 12.2.3.

\*See p. 14 for an explanation of the load table icons.


# SET-3G™ Design Information — Masonry

SET-3G Epoxy Anchor Installation Information — Fully Grouted CMU Construction — Face of Wall



Installation Information	Symbol	Units	Nominal Rod Diameter / Rebar Size			
			3/8" / #3	1/2" / #4	5/8" / #5	3/4" / #6
Drill Bit Diameter — Threaded Rod	$d_o$	in.	7/16	9/16	1 1/16	7/8
Drill Bit Diameter — Rebar	$d_o$	in.	1/2	5/8	3/4	7/8
Minimum Embedment Depth	$h_{ef,min}$	in.	3	3	3	3

SET-3G Epoxy Anchor Installation Information — Fully Grouted CMU Construction — Top of Wall



Installation Information	Symbol	Units	Nominal Rod Diameter / Rebar Size		
			1/2" / #4	5/8" / #5	7/8"
Drill Bit Diameter — Threaded Rod	$d_o$	in.	9/16	1 1/16	1
Drill Bit Diameter — Rebar	$d_o$	in.	5/8	3/4	—
Minimum Embedment Depth	$h_{ef,min}$	in.	3	3	3

SET-3G Epoxy Anchor Installation Information — UngROUTED CMU Construction



Installation Information	Symbol	Units	Nominal Rod Diameter		
			3/8"	1/2"	5/8"
Drill Bit Diameter	$d_o$	in.	9/16	3/4	7/8
Embedment Depth	$h_{ef,min}$	in.	3 1/2	3 1/2	3 1/2

Please see the SET-3G product page at [strongtie.com](http://strongtie.com) and ICC-ES ESR Report for load data.

\*See p. 14 for an explanation of the load table icons.