

## PRODUCT DATA SHEET

# Sikasil® WS-305 AM

Neutral-curing silicone weatherproofing sealant

**TYPICAL PRODUCT DATA (FURTHER VALUES SEE SAFETY DATA SHEET)**

|   |   |
|---|---|
| Chemical base                                   | 1-component silicone  |
| Color (CQP001-1)                                | White, colonial white, black, bronze, medium bronze, aluminum, aluminum gray, anodized light gray, dark gray, gray S6 |
| Cure mechanism                                  | Moisture-curing   |
| Cure type                                       | Neutral   |
| Density (uncured)                               | 1.40 kg/l   |
| Non-sag properties (CQP061-4 / ISO 7390)        | 2 mm  |
| Application temperature                         | Ambient 5 – 40 °C (41 – 104 °F)   |
| Skin time (CQP019-1)                            | 50 minutes  |
| Tack free time (CQP019-3)                       | 130 minutes   |
| Curing speed (CQP049-1)                         | (see Diagram 1)   |
| Shore A hardness (CQP023-1 / ISO 48-4)          | 20  |
| Tensile strength (ASTM D412)                    | 1 MPa (140 psi)   |
| Elongation at break (ASTM D412)                 | 750 %   |
| Tear propagation resistance (CQP045-1 / ISO 34) | 4 N/mm (25 pli)   |
| Service temperature                             | -40 – 150 °C (-40 – 302 °F)   |
| Shelf life                                      | 12 months   |

**DESCRIPTION**

Sikasil® WS-305 AM is a neutral curing silicone sealant with high movement capability and excellent adhesion to a wide range of substrates. It is particularly suited as a weather seal for curtain walls and windows. Sikasil® WS-305 AM is typically used for weathersealing curtain walls and glass butt joints or as a perimeter weather seal for windows, doors, and window walls.


**PRODUCT BENEFITS**

- Meets the requirements of ASTM C920 Type S, Grade NS, Class 50, Use NT, M,G,A
- Meets the requirements of ASTM C1184, Type S, Use G,A
- Meets the requirements of AAMA 803.3 and 808.3
- ASTM E84 with a Flame Spread Index of 15 (Class A acc. to IBC)
- Los Angeles Research Report (LARR) approved
- Good UV and weathering resistance
- Adheres well to many substrates including concrete, glass, metals, coated and painted metals, vinyl, and wood.

**AREAS OF APPLICATION**

Sikasil® WS-305 AM can be used for weatherproofing and sealing applications where durability under severe conditions is required. Additionally, the product properties of Sikasil® WS-305 AM are beneficial for field and shop applications related to rainscreen facades, prefabricated exterior wall systems and modular construction. This product is suitable for experienced professional users only. Testing with actual substrates and conditions should be performed to ensure adhesion and material compatibility.

**PRODUCT DATA SHEET**

Sikasil® WS-305 AM

Version 06.01 (03 - 2023), en\_US  
012603203059001040

## CURE MECHANISM

Sikasil® WS-305 AM cures by reaction with atmospheric moisture. At low temperatures the water content of the air is generally lower and the curing reaction proceeds somewhat slower (see Diagram 1).

The curing speed of the reaction depends mainly on the relative humidity and temperature. Material temperature above 50 °C (122 °F) could lead to bubble formation and has to be avoided.

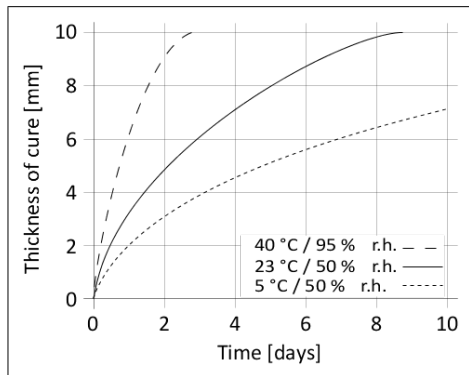


Diagram 1: Curing Speed of Sikasil® WS-305 AM

## METHOD OF APPLICATION

### Surface Preparation

Surfaces must be clean, dry and free from grease, oil and dust. Surface treatment depends on the specific nature of the substrates and is crucial for a long lasting bond. Sikasil® WS-305 AM is designed to obtain adhesion without the use of a primer however, certain substrates may require a primer. Test by applying the sealant and/or primer sealant combination to confirm results and proposed application methods.

### Application

The optimum temperature for substrate and sealant is between 15 °C and 25 °C (59 °F and 77 °F).

Sikasil® WS-305 AM can be processed with manual, pneumatic or electric driven piston guns as well as pump equipment. For advice on selecting and setting up a suitable pump system, contact the System Engineering Department of Sika Industry.

Joints must be properly dimensioned. For optimum performance the joint width needs to be designed according to the movement capability of the sealant based on the actual expected movement. The minimum joint depth is 6 mm (1/4 in.) and a width / depth ratio of minimum 2 : 1 and maximum 4 : 1 must be respected. Joints deeper than 15 mm (9/16 in.) must be avoided.

For backfilling it is recommended to use closed cell, sealant compatible foam backer rods e.g. high resilience polyethylene foam rod. If joints are too shallow for backing material to be employed, we recommend using a polyethylene tape. This acts as a release film (bond breaker), allowing the joint to move and the silicone to stretch freely.

### PRODUCT DATA SHEET

Sikasil® WS-305 AM  
Version 06.01 (03 - 2023), en\_US  
012603203059001040

Sika Corporation  
30800 Stephenson Highway  
Madison Heights, MI 48071  
U.S.A.  
Telephone: +1 248-577-0020  
Email: tsmh@us.sika.com  
www.sikausa.com

## Tooling and finishing

Tooling and finishing must be carried out within the skin time of the sealant or adhesive. When tooling freshly applied Sikasil® WS-305 AM press the adhesive to the joint flanks to get a good wetting of the bonding surface. No tooling agents to be used.

## Removal

Uncured Sikasil® WS-305 AM can be removed from tools and equipment with Sika® Remover-208 or another suitable solvent. Once cured, the material can only be removed mechanically.

Hands and exposed skin have to be washed immediately using hand wipes or a suitable industrial hand cleaner and water.

Do not use solvents on skin.

## Overpainting

Sikasil® WS-305 AM cannot be overpainted.

## Application Limits

- Due to staining, Sikasil® WS-305 AM is not recommended for use on natural stone such as marble, granite, quartzite, etc.
- Most Sikasil® WS, SG, IG and WT, silicones manufactured by Sika are compatible with each other and with SikaForce® products.
- For specific information regarding compatibility between various Sikasil® and SikaForce® products contact the Technical Department of Sika Industry.
- To exclude materials influencing Sikasil® WS-305 AM, all materials such as gaskets, tapes, setting blocks, sealants, etc., in direct and indirect contact have to be approved by Sika in advance.
- Where two or more different reactive sealants are used, allow the first to cure completely before applying the next. Sikasil® WS-305 AM may only be used in combination with structural glazing applications after a detailed examination of the corresponding project details.
- Do not use Sikasil® WS-305 AM on PMMA and PC elements as it may cause environmental stress cracking (crazing).

## FURTHER INFORMATION

The information herein is offered for general guidance only. Advice on specific applications is available on request from the Technical Department of Sika Industry.

Copies of the following publications are available on request:

- Safety Data Sheets
- General Guideline  
Sikasil® Weather Sealants

## PACKAGING INFORMATION

|           |         |
|-----------|---------|
| Cartridge | 295 ml  |
| Unipack   | 600 ml  |
| Pail      | 4.5 gal |
| Drum      | 52 gal  |

## BASIS OF PRODUCT DATA

All technical data stated in this document are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

## ENVIRONMENTAL, HEALTH AND SAFETY

For further information and advice regarding transportation, handling, storage and disposal of chemical products, user should refer to the actual Safety Data Sheets containing physical, environmental, toxicological and other safety related data. User must read the current actual Safety Data Sheets before using any products. In case of an emergency, call CHEMTREC at 1-800-424-9300, International 703-527-3887.

## LEGAL DISCLAIMER

Prior to each use of any product of Sika Corporation, its subsidiaries or affiliates ("SIKA"), the user must always read and follow the warnings and instructions on the product's most current product label, Product Data Sheet and Safety Data Sheet which are available at [usa.sika.com](http://usa.sika.com) or by contacting SIKA's Technical Service Department via email at [tsmh@us.sika.com](mailto:tsmh@us.sika.com). Nothing contained in any SIKA literature or materials relieves the user of the obligation to read and follow the warnings and instructions for each SIKA product as set forth in the current product label, Product Data Sheet and Safety Data Sheet prior to use of the SIKA product. SIKA warrants this product for one year from date of installation to be free from manufacturing defects and to meet the technical properties on the current Product Data Sheet if used as directed within the product's shelf life. User determines suitability of product for intended use and assumes all risks. User's and/or buyer's sole remedy shall be limited to the purchase price or replacement of this product exclusive of any labor costs. **NO OTHER WARRANTIES EXPRESS OR IMPLIED SHALL APPLY INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SIKA SHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES. SIKA SHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS.** Sale of SIKA products are subject to the Terms and Conditions of Sale which are available at <https://usa.sika.com/en/group/SikaCorp/termsandconditions.html> or by calling +1 800-933-7452.

