

# Compression Lug Splices

## Short Barrel



### Features

- Seamless, high conductivity copper tubing, suitable for heavy duty applications
- Tin-plated to provide corrosion resistance
- Color coded

### Applications

- Suitable for use at voltages up to 35 KV provided connector is properly taped
- 5 KV is the maximum voltage in all bare splice applications




### Standard Material

- Copper

### Standard Finish

- Tin plated

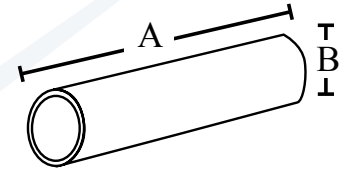

Catalog Number	UPC	Wire Size	Color Code	Unit Carton	Ship Case	Weight/Case	Inches	
							A	B
<b>3301</b>	81599	<b>#8</b>	Red	100	1000	11	.90	.17
<b>3302</b>	81600	<b>#6</b>	Blue	100	1000	12	1.00	.20
<b>3303</b>	81601	<b>#4</b>	Gray	100	1000	14	1.00	.25
<b>3305</b>	81602	<b>#2</b>	Brown	100	1000	19	1.25	.31
<b>3305A</b>	81603	<b>#1</b>	Green	50	500	33	1.60	.39
<b>3306</b>	81604	<b>1/0</b>	Pink	50	500	39	1.75	.44
<b>3307</b>	81605	<b>2/0</b>	Black	50	500	39	1.75	.49
<b>3308</b>	81606	<b>3/0</b>	Orange	50	500	37	1.90	.55
<b>3309</b>	81607	<b>4/0</b>	Purple	25	250	26	2.00	.59
<b>3309A</b>	81608	<b>250 MCM</b>	Yellow	25	250	27	2.10	.66
<b>3310</b>	81609	<b>350 MCM</b>	Red	20	200	27	2.10	.70
<b>3310A</b>	81610	<b>400 MCM</b>	Blue	10	100	20	2.30	.76
<b>3311</b>	81611	<b>500 MCM</b>	Brown	10	100	21	2.50	.83
<b>3311A</b>	81612	<b>600 MCM</b>	Green	5	50	17	2.50	.93
<b>3312</b>	81613	<b>750 MCM</b>	Black	5	50	22	3.21	1.03