

# Straight Liquidtight Connectors with Insulated Throat - Malleable Iron

## Features

- Liquidtight, raintight, oiltight
- Suitable for wet location use
- Tapered threaded male hub NPT
- Insulated throat protects conductors from abrasion damage
- Compact slim diameter with small turning radius
- Zinc electro plated for excellent durability



## Applications

- To secure, ground and seal liquidtight conduit to a box or enclosure
- UL listed liquidtight flexible metal conduit fittings are suitable for use in the following hazardous locations under: NEC 501-4(b), 502-4(a), (2)503-3(a) Class 1 Div.2, Class II Div.1 and 2, Class III Div.1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I




## Standard Material

- Malleable iron
- Steel locknut

## Standard Finish

- Zinc plated

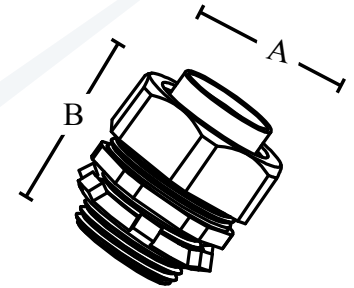

Catalog Number	UPC	Conduit Size	Unit Carton	Ship Case	Weight/Case	Inches	
						A	B
<b>470S</b>	14430	<b>3/8" 1/2" KO</b>	20	200	31	1.18	1.72
<b>471S</b>	14440	<b>1/2"</b>	20	200	33	1.36	1.73
<b>472S</b>	14450	<b>3/4"</b>	10	100	25	1.61	1.81
<b>473S</b>	14460	<b>1"</b>	5	50	18	1.89	1.85
<b>474S</b>	33620	<b>1-1/4"</b>	5	50	28	2.39	2.05
<b>475S</b>	33630	<b>1-1/2"</b>	2	20	15	2.62	2.38
<b>476S</b>	33640	<b>2"</b>	2	20	22	3.24	2.49
<b>477S</b>	33650	<b>2-1/2"</b>	---	1	2	3.89	3.21
<b>478S</b>	33660	<b>3"</b>	---	1	3	4.74	3.37
<b>479S</b>	33670	<b>3-1/2"</b>	---	1	4	5.31	3.40
<b>480S</b>	33680	<b>4"</b>	---	1	5	5.82	3.66
<b>480SA*</b>	85294	<b>5"</b>	---	1	10	6.06	4.63
<b>480SB*</b>	85324	<b>6"</b>	---	1	13	7.75	4.94

\*480SA and 480SB not UL listed