

# Rigid Conduit Bodies

## Threaded C Type - Hot Dip Galvanized

### Features

- Hot dip galvanized finish provides superior protection against severe environmental factors

### Applications

- Provides taps for branch conduit runs
- Enables 90 degree bends in conduit runs

### Standard Material

- Malleable iron


### Standard Finish

- Hot dip galvanized



E195124

Conforms to finish thickness ASTM  
A123/123M  
UL 514A  
NEMA FB 1  
Federal Spec. A-A-50563

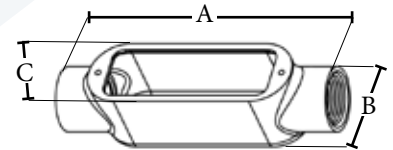

Catalog Number	UPC	Size	Max. Number	Wire Size		Internal Volume (in <sup>3</sup> )	Ship Case	Weight/Case	Inches		
				Max. Size					A	B	C
<b>C1MHDG</b>	86643	<b>1/2"</b>	---	---		4.5	10	6	5.43	1.46	1.36
<b>C2MHDG</b>	86644	<b>3/4"</b>	3	6 AWG		7.5	10	9	6.18	1.65	1.57
<b>C3MHDG</b>	86645	<b>1"</b>	3	4 AWG		12.5	5	6	7.16	1.98	1.79
<b>C4MHDG</b>	86646	<b>1-1/4"</b>	3	2 AWG		32.3	5	12	9.00	2.60	2.52
<b>C5MHDG</b>	86647	<b>1-1/2"</b>	3	1/0 AWG		35.3	2	6	9.07	2.80	2.52
<b>C6MHDG</b>	86648	<b>2"</b>	3	3/0 AWG		73	1	6	11.54	3.52	3.15
<b>C7MHDG</b>	86649	<b>2-1/2"</b>	3	250 MCM		138	1	10	15.28	3.98	4.45
<b>C8MHDG</b>	86650	<b>3"</b>	3	250 MCM		170	1	15	15.39	4.65	4.45
<b>C9MHDG</b>	86651	<b>3-1/2"</b>	3	350 MCM		300	1	27	18.30	5.43	5.53
<b>C10MHDG</b>	86652	<b>4"</b>	3	350 MCM		328	1	24	18.30	5.74	5.53