

# Rigid Conduit Bodies with Cover and Gasket

## Threaded C Type

### Features

- Threaded C type with cover and gasket
- NPT tapered hubs
- Suitable for use in concrete
- Suitable for use in wet locations

### Applications


- Provides access to conductors for pulling, splicing and maintenance

### Standard Material

- Copper free aluminum die cast
- Cover - Stamped steel
- Gasket- Neoprene rubber

### Standard Finish

- Powder coat

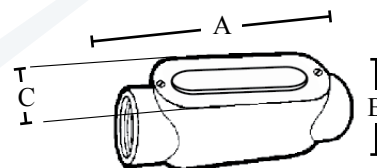

Catalog Number	UPC	Size	Wire Size		Unit Carton	Ship Case	Weight/Case	Inches		
			Max. Number	Max. Size				A	B	C
<b>C1CG</b>	19901	<b>1/2"</b>	1	6 AWG	10	100	30	4.720	1.370	1.330
<b>C2CG</b>	19911	<b>3/4"</b>	2	6 AWG	10	50	25	5.570	1.625	1.540
<b>C3CG</b>	19921	<b>1"</b>	3	6 AWG	5	25	18	6.460	1.900	1.740
<b>C4CG</b>	19931	<b>1-1/4"</b>	3	2 AWG	2	10	17	8.528	2.770	2.490
<b>C5CG</b>	19941	<b>1-1/2"</b>	3	2 AWG	2	10	19	8.528	2.770	2.490
<b>C6CG</b>	19951	<b>2"</b>	3	2/O AWG	1	5	14	10.831	3.335	3.100
<b>C7CG</b>	19961	<b>2-1/2"</b>	3	4/O AWG	---	1	7	13.500	4.060	4.450
<b>C8CG</b>	19971	<b>3"</b>	3	250 MCM	---	1	7	13.500	4.685	4.450
<b>C9CG</b>	19981	<b>3-1/2"</b>	3	350 MCM	---	1	10	15.937	5.450	5.500
<b>C10CG</b>	19991	<b>4"</b>	4	350 MCM	---	1	10	15.937	5.450	5.500