

Rigid Conduit Bodies

LL Type - Form 7

Features

- NPT tapered hubs
- NEMA FB 1/NEMA 3R raintight when installed with cover and gasket
- Suitable for Class 1 Div.2 hazardous locations when installed according to NEC 2014 501.10(B)(4)

Applications

- Serves as pull outlet for conductors being installed

Standard Material


- Gray iron

Standard Finish

- Zinc plated
- Eco-friendly finish with superior corrosion resistant coating
- ASTM B117 (200+ HR NaCL spray test)
- Highly resistant to solvents, fuels and acids



UL 514A and UL 514B
NEMA FB 1
Federal spec A-A-50563

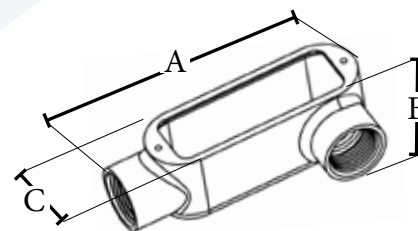

Catalog Number	UPC	Size	Wire Size		Internal Volume (in ³)	Ship Case	Weight/Case	Inches		
			Max. Number	Max. Size				A	B	C
LL1G7	86925	1/2"	---	---	3.8	10	8	4.5	2.3	1.4
LL2G7	86926	3/4"	3	6 AWG	5.8	10	12	5.2	2.5	1.7
LL3G7	86927	1"	3	4 AWG	9	5	9	6.2	2.8	1.9
LL4G7	86928	1-1/4"	3	2 AWG	17.8	10	25	6.5	3.1	2.3
LL5G7	86929	1-1/2"	3	2 AWG	24	10	30	7.1	3.4	2.6
LL6G7	86930	2"	3	1/0 AWG	45	5	24	8.1	4.0	3.1
LL7G7	86931	2-1/2"	3	250 MCM	95.8	1	8	10.7	5.8	3.7
LL8G7	86932	3"	3	250 MCM	119	1	10	10.7	5.8	4.4
LL10G7	86934	4"	3	350 MCM	231	1	17	12.8	7.0	5.4