

Rigid Conduit Bodies

Threaded LL Type - Hot Dip Galvanized

Features

- Hot dip galvanized finish provides superior protection against severe environmental factors

Applications

- Provides taps for branch conduit runs
- Enables 90 degree bends in conduit runs

Standard Material


- Malleable iron

Standard Finish

- Hot dip galvanized



Conforms to finish thickness ASTM
A123/123M
UL 514A and UL 514D
NEMA FB 1
Federal Spec. A-A-50563

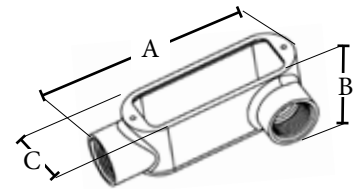

Catalog Number	UPC	Size	Wire Size		Internal Volume (in ³)	Ship Case	Weight/Case	Inches		
			Max. Number	Wire Size Max. Size				A	B	C
LL1MHDG	86623	1/2"	---	---	4.5	10	7	4.69	1.46	2.08
LL2MHDG	86624	3/4"	3	6 AWG	7.5	10	10	5.42	1.65	2.31
LL3MHDG	86625	1"	3	4 AWG	12.5	5	6	6.28	1.98	2.68
LL4MHDG	86626	1-1/4"	3	2 AWG	32.3	5	13	8.12	2.60	3.41
LL5MHDG	86627	1-1/2"	3	1/0 AWG	35.3	2	6	8.15	2.80	3.45
LL6MHDG	86628	2"	3	4/0 AWG	73	1	6	10.53	3.52	4.15
LL7MHDG	86629	2-1/2"	3	300 MCM	142	1	10	13.76	3.98	5.86
LL8MHDG	86630	3"	3	350 MCM	173	1	13	13.82	4.65	5.92
LL9MHDG	86631	1/2"	3	350 MCM	300	1	22	16.65	5.43	7.14
LL10MHDG	86632	4"	3	350 MCM	330	1	24	16.65	5.74	7.19