

# Rigid Conduit Bodies

## Threaded T Type - Hot Dip Galvanized

### Features

- Hot dip galvanized finish provides superior protection against severe environmental factors

### Applications

- Provides taps for branch conduit runs
- Enables 90 degree bends in conduit runs

### Standard Material


- Malleable iron

### Standard Finish

- Hot dip galvanized



Conforms to finish thickness ASTM  
A123/123M  
UL 514A and UL 514D  
NEMA FB 1  
Federal Spec. A-A-50563

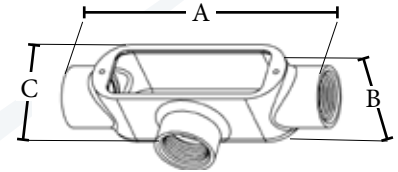

Catalog Number	UPC	Size	Wire Size		Internal Volume (in <sup>3</sup> )	Ship Case	Weight/Case	Inches		
			Max. Number	Max. Size				A	B	C
<b>T1MHDG</b>	86653	<b>1/2"</b>	---	---	4	10	9	5.35	1.31	2.02
<b>T2MHDG</b>	86654	<b>3/4"</b>	3	6 AWG	7	10	11	6.00	1.62	2.22
<b>T3MHDG</b>	86655	<b>1"</b>	3	4 AWG	12	5	8	7.06	1.88	2.56
<b>T4MHDG</b>	86656	<b>1-1/4"</b>	3	2 AWG	33	5	14	7.25	2.50	3.50
<b>T5MHDG</b>	86657	<b>1-1/2"</b>	3	1 AWG	36	2	6	9.25	2.67	3.50
<b>T6MHDG</b>	86658	<b>2"</b>	3	2/0 AWG	76	1	6	11.50	3.29	4.25
<b>T7MHDG</b>	86659	<b>2-1/2"</b>	3	300 MCM	146	1	12	15.00	3.94	5.72
<b>T8MHDG</b>	86660	<b>3"</b>	3	300 MCM	185	1	15	15.125	4.75	8.88
<b>T9MHDG</b>	86661	<b>3-1/2"</b>	3	350 MCM	300	1	27	18.125	5.20	6.81
<b>T10MHDG</b>	86662	<b>4"</b>	3	350 MCM	330	1	28	18.125	5.56	7.20