

# Rigid Conduit Bodies

## T Type - Form 7



### Features

- NPT tapered hubs
- NEMA FB 1/NEMA 3R raintight when installed with cover and gasket
- Suitable for Class 1 Div.2 hazardous locations when installed according to NEC 2014 501.10(B)(4)

### Applications

- Serves as pull outlet for conductors being installed

### Standard Material


- Gray iron

### Standard Finish

- Zinc plated
- Eco-friendly finish with superior corrosion resistant coating
- ASTM B117 (200+ HR NaCL spray test)
- Highly resistant to solvents, fuels and acids



UL 514A and UL 514B  
NEMA FB 1  
Federal spec A-A-50563

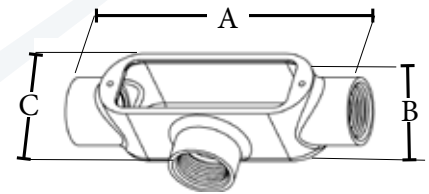

| Catalog Number | UPC   | Size          | Wire Size   |           | Internal Volume (in <sup>3</sup> ) | Ship Case | Weight/Case | Inches |     |     |
|----------------|-------|---------------|-------------|-----------|------------------------------------|-----------|-------------|--------|-----|-----|
|                |       |               | Max. Number | Max. Size |                                    |           |             | A      | B   | C   |
| <b>T1G7</b>    | 86935 | <b>1/2"</b>   | ---         | ---       | 3.8                                | 10        | 8           | 5.3    | 2.5 | 1.8 |
| <b>T2G7</b>    | 86936 | <b>3/4"</b>   | 3           | 6 AWG     | 5.8                                | 10        | 13          | 6.2    | 2.7 | 2.0 |
| <b>T3G7</b>    | 86937 | <b>1"</b>     | 3           | 4 AWG     | 9                                  | 5         | 9           | 7.3    | 3.0 | 2.3 |
| <b>T4G7</b>    | 86938 | <b>1-1/4"</b> | 3           | 2 AWG     | 17.8                               | 10        | 26          | 7.4    | 3.1 | 2.3 |
| <b>T5G7</b>    | 86939 | <b>1-1/2"</b> | 3           | 2 AWG     | 24                                 | 10        | 32          | 8.2    | 3.4 | 2.6 |
| <b>T6G7</b>    | 86940 | <b>2"</b>     | 3           | 1/0 AWG   | 45                                 | 5         | 25          | 9.1    | 4.0 | 3.1 |
| <b>T7G7</b>    | 86941 | <b>2-1/2"</b> | 3           | 2/0 AWG   | 95.8                               | 1         | 8           | 12.4   | 5.8 | 3.7 |
| <b>T8G7</b>    | 86942 | <b>3"</b>     | 3           | 2/0 AWG   | 119                                | 1         | 11          | 12.4   | 5.8 | 4.4 |
| <b>T10G7</b>   | 86944 | <b>4"</b>     | 3           | 250 MCM   | 231                                | 1         | 18          | 14.5   | 7.0 | 5.4 |