



Attach the Slide™ adaptor to each of the two FormRail™ tapeless seals by sliding it through the grooves along the rails. Note: You may need to remove the red end-cap first when using older FoamRail™ products.

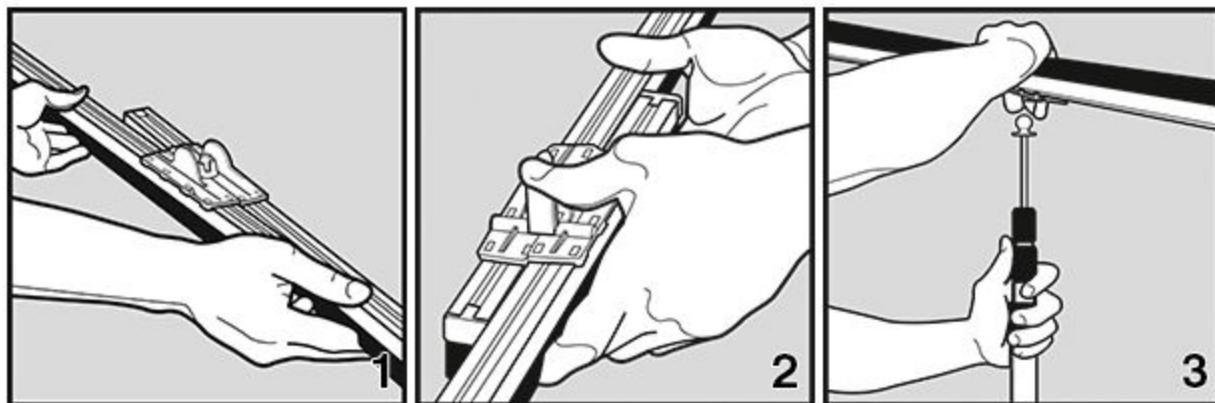

Extend the adjustable tapeless seal and flip the red tab to lock it at the desired width. **IMPORTANT:** Notice the arrows on the red slide – the direction of extending the tapeless seal is essential to its proper function (fig.4-5).

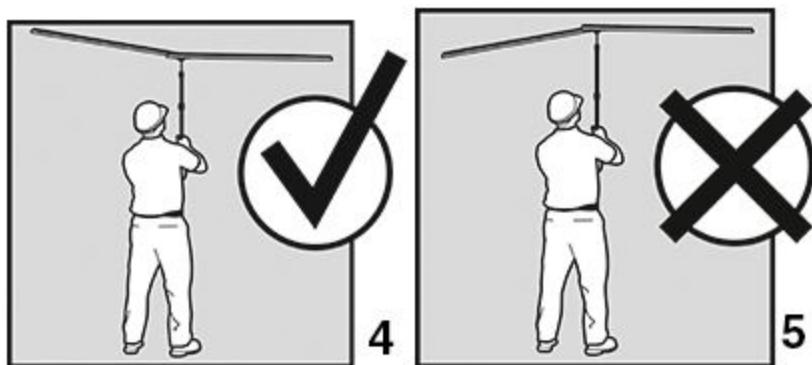

To seal a dust barrier at the ceiling, snap the adjustable tapeless seal onto the ball joint of a ZipWall® pole, raise the pole with the attached FoamRail™ to the ceiling, and lock it into place.

To seal a dust barrier at the floor, use Floor Adaptors. Replace the foot of the pole with a Floor Adaptor, place the FoamRail™ on the floor, snap the pole onto it and set up the pole. *Note: A barrier can be sealed at the ceiling and floor simultaneously with one pole.*